


Heat sealing strength

[Composition] Bleached single-sided gloss kraft paper (50 g/m²) / PE (15 μm) / AL (7 μm) / Resin

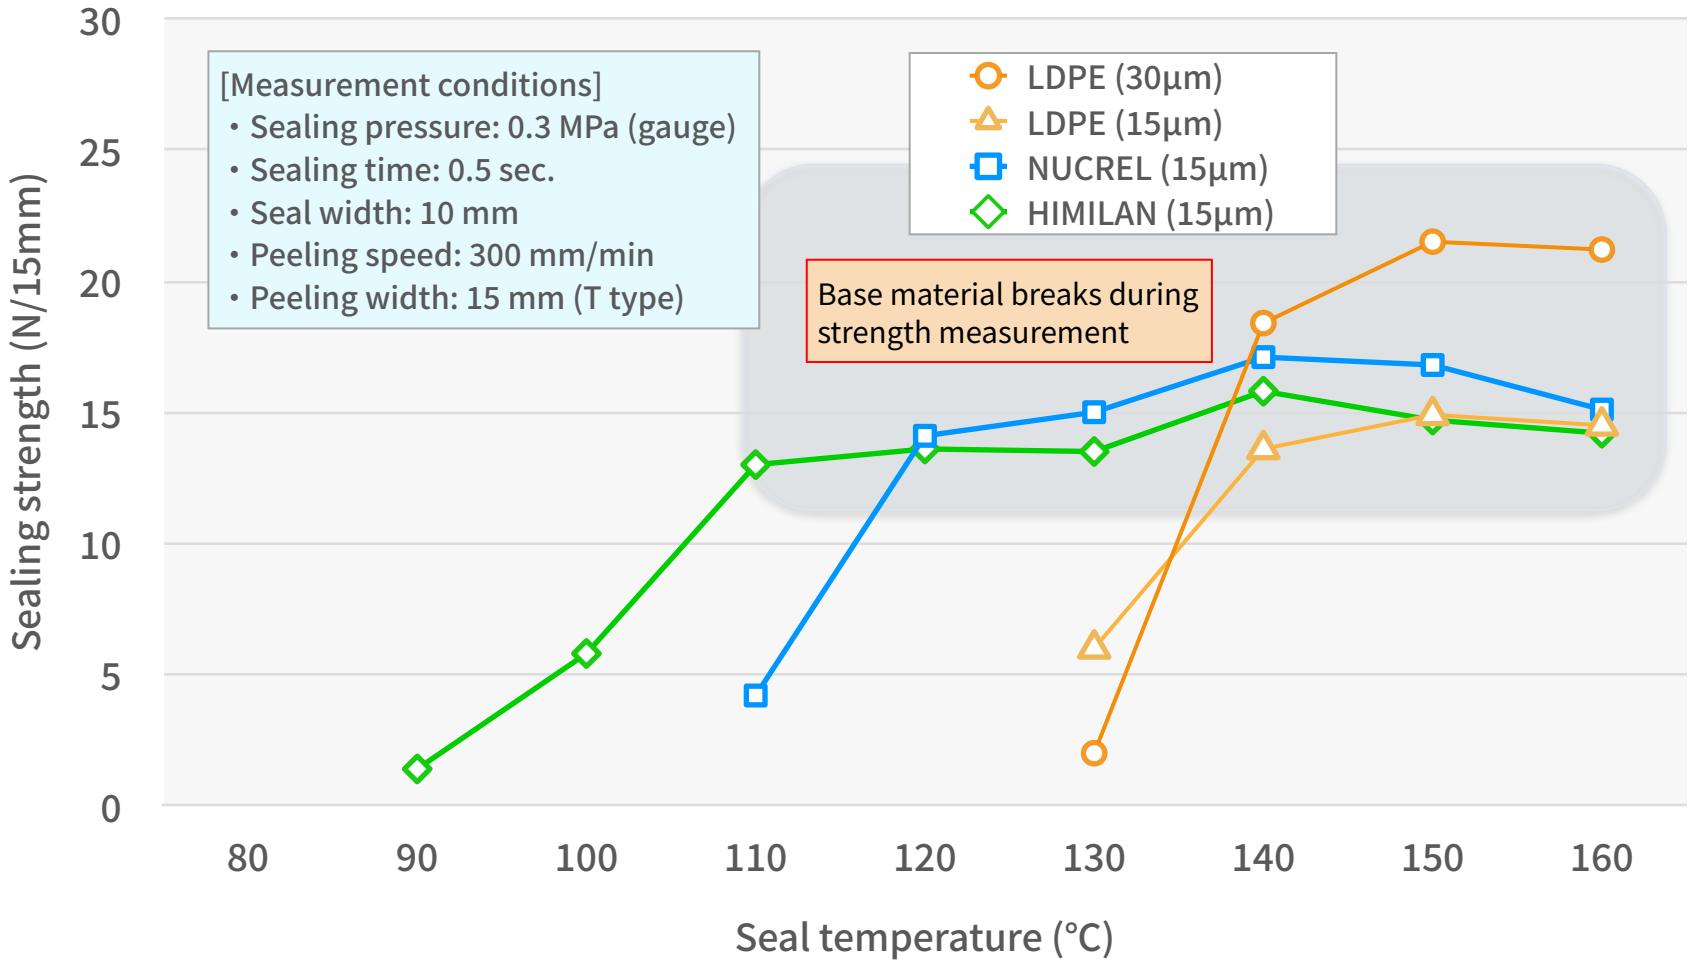

Hot tack strength

[Composition] Bleached single-sided gloss kraft paper (50 g/m²) / PE (15 μm) / AL (7 μm) / Resin

